


VERTICAL DRILLING MACHINE MODEL : Z5040E



Electronic power feed



DESCRIPTION

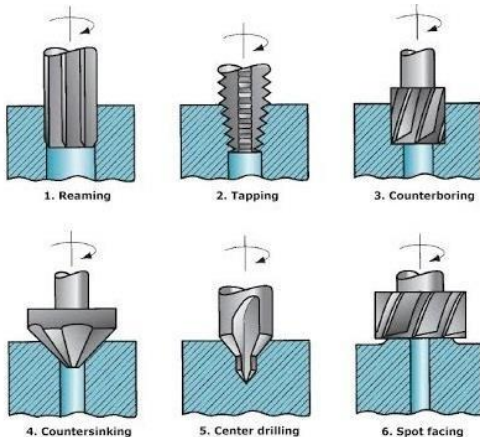

The machine tool is used as drilling, counter boring, reaming, tapping and spot facing with advantages of large drilling capacity and wide scope of processing parts, therefore this machine is not only used on product workshops but also for repairing workshops. Table support can go up and down and can also be rotated $\pm 180^\circ$ around the column. The table can be rotated $\pm 180^\circ$ in the table support and can also be rotated $\pm 45^\circ$ horizontally with support base. So the operation of this machine tool is portable, flexible and reliable.

TECHNICAL PARAMETERS:

VERTICAL DRILLING MACHINE	
Model No	: Z5040E
Brand Name	: “PROTECH”
Maximum Drilling Diameter	: 40 mm
Spindle Taper	: MT4#
Distance from the center of Spindle to the Surface of the Vertical Column	: 350 mm
Maximum travel of Spindle	: 180 mm
Range of Spindle Speed	: 50 ~ 1450 rpm
Max. Distance from Spindle nose to Base plate working surface	: 1215 mm
Max. Distance from spindle nose to working table	: 770 mm
Dimension of Working Table	: 560 x 560 mm
Dimension of Base	: 730 x 500 mm
Width of T-Slot	: 18 mm
Distance of T-Slot of Base	: 150 mm
Range of Feed	: 0.1, 0.2 mm/rev
Main Power Motor	: 1.5 kw
Power of Coolant Pump	: 70 W
Voltage	: 380V/ 60/50Hz- 3Phase
Overall Dimension (L x W x H)	: 940 x 560 x 2260 mm
Packing Size (L x W x H)	: 1150 x 700 x 2280 mm
Gross Weight / Net Weight	: 610/460 kg
Brand New	: China

+971 6 543 9350

+971 55 931 3584

www.tsfuae.com

admin@tsfuae.com

Ind 2 / Sharjah - UAE