


PUNCHING AND CURVING MACHINE MODEL: YX35-250-1000



PROFILES:

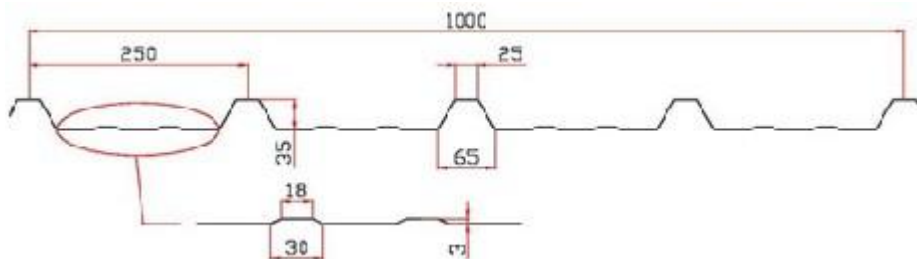

(Profile size can be customized as per demand)

MAIN PERFORMANCE:

Line speed	: 0.5--5m/min (adjustable)
Suitable thickness for production	: 0.4-0.8mm
Yield strength	: ≤ 235 Mpa
Machine dimension	: $\approx 2800\text{mm} \times 2050\text{mm} \times 1630\text{mm}$
Total G.W	: approx 1200kg
Total power	: approx 3.7kW
Voltage	: 380V/50 Hz

TECHNICAL PARAMETERS:

Drive motor	: approx 2.2kW
Hydraulic motor	: approx 1.5kW
Hydraulic station oil	: 46# Anti-wear hydraulic oil
Material for press module	: Cr12, with quenched and nitride surface
Minimal forming radius	: 510mm
Operation language	: English and Chinese

MAIN ELECTRIC BRANDS:

PLC	: Taiwan Delta
Encode	: Japan Omron
Touch Screen	: Taiwan Delta
Solenoid pilot actuated valve	: Taiwan Uoshen
Other electrics	: Suzhou Siemens

MAIN COMPONENTS:

Hydraulic	: pressing unit 1 pc
Main frame	: 1 pc
Hydraulic station	: 1 pc
PLC control cabinet	: 1 pc



Technology Solution
Factories Machines TR L.L.
شركة حلول التقنية
لتجارة معدات المصانع ذ.م.م

٢